

# Linear 12

Acoustic Absorption Panel

WOODFIT

ACOUSTICS


.80 - .85

Noise Reduction Coefficient (NRC)

7.23%

Open Area


www.woodfitacoustics.com

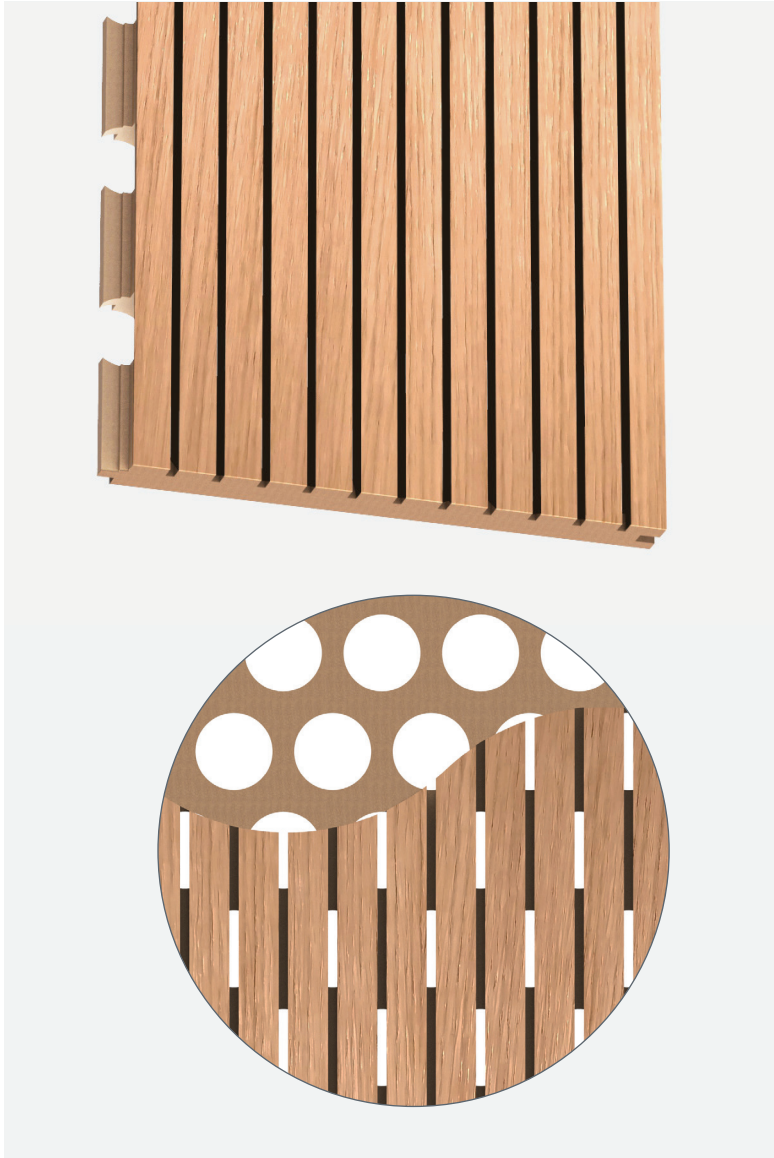

## Sound Absorption

— Installation A : 50mm rockwool insulation


— Installation B : 50mm rockwool insulation plus 200mm cavity

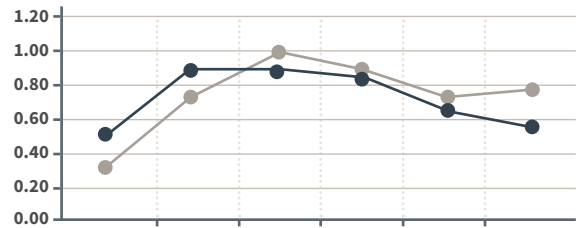


Frequency	125	250	500	1K	2k	4k
Installation A	0.33	0.72	0.99	0.87	0.70	0.76
Installation B	0.51	0.88	0.90	0.85	0.67	0.54

## Materials & Colours


Veneer/ Melamine/ Laminate




WHITE OAK




MAPLE




CHERRY



WALNUT



ASH



LIMED OAK



Available Dimensions: 2440mm, 3050mm, custom

Available on Request:

- Fire rating Euroclass B/C/D
- FSC certification
- Custom cutouts, size, shape, curvature

Available on Request:

- Large range of veneers, laminates and melamines
- RAL colour lacquer and colour board

Please Note

- All colours and grains subject to availability
- Wood is a natural material and may be subject to shade variations

