

# P003

## Perforated Acoustic Absorption Panel

WOODFIT  
ACOUSTICS

.45 - .65

Noise Reduction Coefficient (NRC)

6.49%

Open Area


www.woodfitacoustics.com



## Sound Absorption

— Installation A : 50mm rockwool insulation


— Installation B : 50mm rockwool insulation plus 200mm cavity

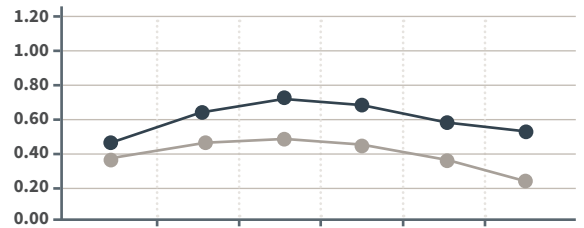


Frequency	125	250	500	1K	2k	4k
Installation A	0.39	0.46	0.48	0.45	0.38	0.33
Installation B	0.45	0.64	0.71	0.68	0.59	0.55

## Materials & Colours


Veneer/ Melamine/ Laminate




WHITE OAK




MAPLE




CHERRY



WALNUT



ASH



LIMED OAK



**Available Dimensions:** 600mm x 600mm, 1200mm x 600mm, custom

### Available on Request:

- Fire rating Euroclass B/C/D
- FSC certification
- Custom cutouts, size, shape, curvature

### Available on Request:

- Large range of veneers, laminates and melamines
- RAL colour lacquer and colour board

### Please Note

- All colours and grains subject to availability
- Wood is a natural material and may be subject to shade variations

