

# S004

## Slotted Acoustic Absorption Panel

WOODFIT  
ACOUSTICS


.65 - .75

Noise Reduction Coefficient (NRC)

7.94%

Open Area


www.woodfitacoustics.com

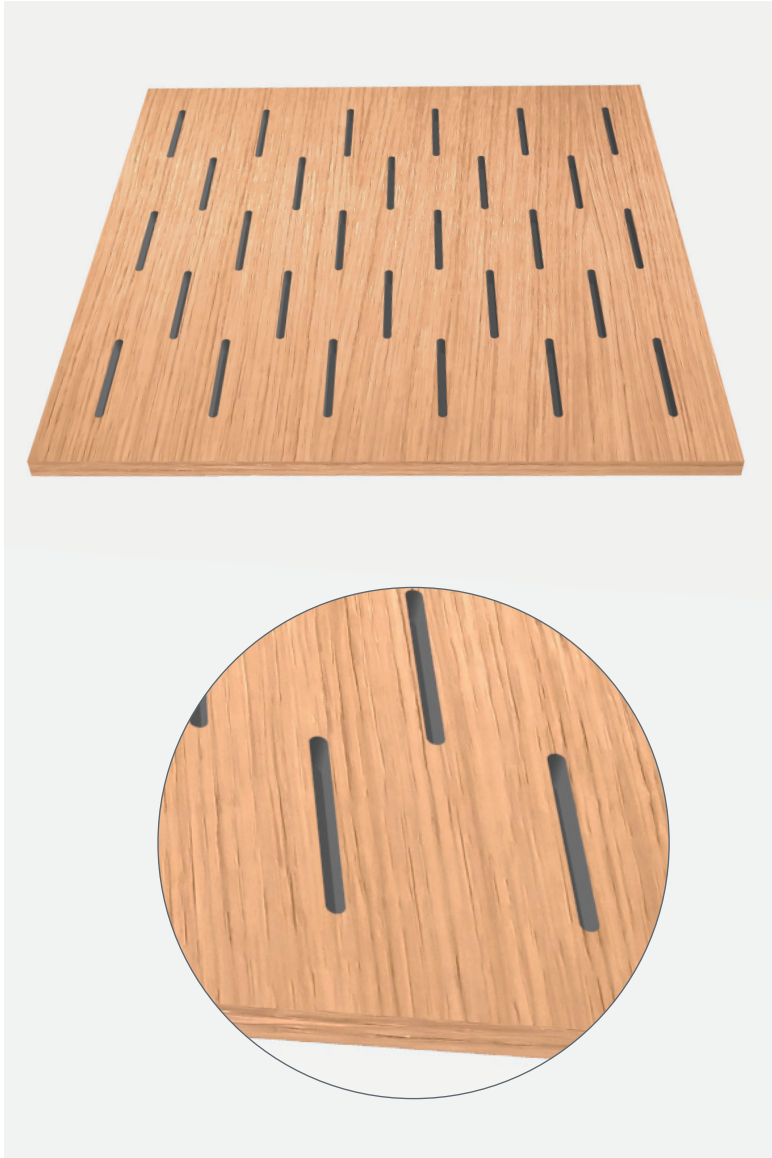

## Sound Absorption

— Installation A : 50mm rockwool insulation


— Installation B : 50mm rockwool insulation plus 200mm cavity

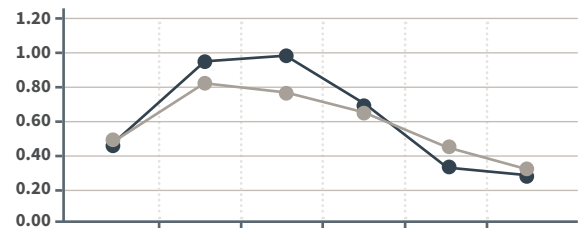


Frequency	125	250	500	1K	2k	4k
Installation A	0.48	0.81	0.78	0.65	0.43	0.34
Installation B	0.45	0.95	0.99	0.69	0.35	0.29

## Materials & Colours


Veneer/ Melamine/ Laminate




WHITE OAK




MAPLE




CHERRY



WALNUT



ASH



LIMED OAK



Available Dimensions: 600mm x 600mm/ 1200mm x 600mm, custom

Available on Request:

- Fire rating Euroclass B/C/D
- FSC certification
- Custom cutouts, size, shape, curvature

Available on Request:

- Large range of veneers, laminates and melamines
- RAL colour lacquer and colour board

Please Note

- All colours and grains subject to availability
- Wood is a natural material and may be subject to shade variations

