

# P002

## Perforated Acoustic Absorption Panel

WOODFIT  
ACOUSTICS

.30 - .35

Noise Reduction Coefficient (NRC)

2.34%

Open Area


www.woodfitacoustics.com



## Sound Absorption

—●— Installation A : 50mm rockwool insulation

—●— Installation B : 50mm rockwool insulation plus 200mm cavity

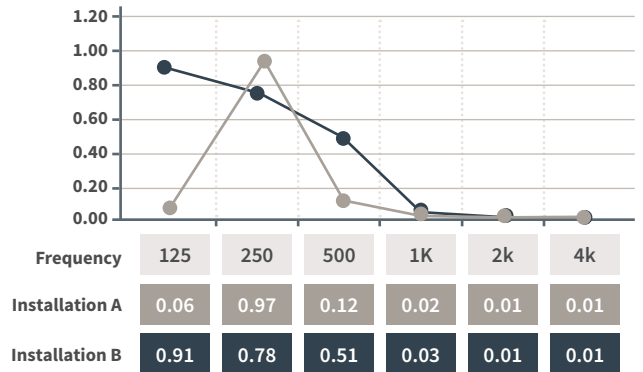


## Materials & Colours


Veneer/ Melamine/ Laminate




WHITE OAK




MAPLE




CHERRY



WALNUT



ASH



LIMED OAK



**Available Dimensions:** 600mm x 600mm, 1200mm x 600mm, custom

### Available on Request:

- Fire rating Euroclass B/C/D
- FSC certification
- Custom cutouts, size, shape, curvature

### Available on Request:

- Large range of veneers, laminates and melamines
- RAL colour lacquer and colour board

### Please Note

- All colours and grains subject to availability
- Wood is a natural material and may be subject to shade variations

